

3M Super 33+ Scotch™ Vinyl Electrical Tape



A premium grade, 7-mil (.18mm) tape that works from - 18° C/O° F up to 105°C/220°F. Use as a primary insulation wire for wire cable splices up to 600 V and for fixture and wire splices up to 1000 V. Size: 3/4" x 66'.

- Flame retardant
- Resists UV rays, abrasion, moisture, alkalis, acids and corrosion
- Meets requirements of: ASTM D-3005 Type I, UL 510, HHI-595C, and CSA 22.2

ITEM	DESCRIPTION
17000130	33+D SCOTCH ELECT TAPE 3/4X66'

Highland™ Electrical Tape

A moderately priced, 7-mil (.18) mm tape for holding, protecting and insulating.



- Flame retardant
- UL listed for 80°C/176°F
- 3/4" x 66'

ITEM	DESCRIPTION
17000140	HIGHLAND VNYL ELECT TAPE3/4X66'

Scotch Code™ Wire Marker Tape Dispenser & Tape Refills



Provides fast, convenient marking of wire or cable. Ten refillable compartments let you choose the exact number/letter combinations needed.

- Compact dispenser
- Broad selection of SER refill tapes
- Dispenser filled with 10 rolls or numbered tape (one each 0-9)

ITEM	DESCRIPTION
17000150	3M WIRE MARKER TAPE DISPENSER
17000160	3M REFILL FOR WIRE MARKER DISP



Cable Ties

3M Cable Ties are all nylon, and function normally in a wide range of service temperatures from -40°F to +185°F.

- 7" self-locking head with heavy double teeth on the one piece pawl
- Lock quickly and stay secure without slipping


ITEM	DESCRIPTION
17000170	7 IN NYLON CABLE TIES 100/BAG

3M Electrical Spring Wire Connector Products

Temperature Rating: 105°C.

Voltage Rating: 600V maximum for building wire 1000V maximum for signs, fixtures and luminaires. The UL listed file no. is E23438, CSA file no. is LR 15503. These connectors comply with Federal specification W-S-610.

Scotchlok Insulated Electrical Connectors Featuring a "live spring" which assures a tight grip, even on small wire combinations, these premium grade connectors can be "backed-off" to allow maintenance or modification of electrical systems.




- Insulated with a color-coded, pliable, vinyl skirt
- Common AWG solid copper combinations

TYPE	NO. OF WIRES	WIRE SIZE (AWG)
Y	2-5	18
	1-3	14
	2	12
R	7-9	18
	2-5	14
	2-5	12

ITEM	DESCRIPTION
17000206	TYPE Y PKG 33 ELECT CONNECTOR
17000210	TYPE Y SCOTCHLOK CONNECTOR
17000216	TYPE R PKG 20 ELECT CONNECTOR
17000220	TYPE R SCOTCHLOK CONNECTOR

3M Ranger™ Insulated Electrical Connectors



Features a "live spring" which assures a tight grip, even on small wire combinations, and wings on the bottom for easy torquing.

- Nylon insulated

ITEM	DESCRIPTION
17000230	312 RANGER 3M WIRE CONNECTOR

Scotchlok 2 Electrical Connectors




Operating Temperature: 105C max.

Voltage Rating: 600 volts maximum, building wire. 1000 volts maximum in signs, fixtures and luminaires.

- Flexible skirt for maximum protection
- Greater wire capacity
- One connector replaces three

ITEM	DESCRIPTION
17000250	O/B SMALL 3M SCOTCHLOK 2 CONN
17000260	R/Y MEDIUM 3M SCOTCHLOK 2 CONN
17000270	B/G LARGE 3M SCOTCHLOK 2 CONN

Direct Bury Splice Kits

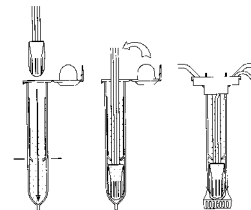

Splice and effectively moisture seal two or more conductors for remote control circuits in irrigation and lighting systems.

DBY and DBR up to 30V. DBY-6 and DBR-6 are UL listed and CSA certified for 600V.

- Common AWG Cu to Hot Cu wire combinations solid or stranded:
DBY & DBY-6: 2-5 - #18, 2 - #12
DBR & DBY-6: 7 - #18, 5 - #16, 4 - #12, 3 - #10

ITEM	DESCRIPTION
17000280	3M DBY SPLICE KIT W/2 SPLICES
17000285	3M DBY BULK PACK SPLICE
17000290	3M DBR SPLICE KIT W/2 SPLICE
17000295	3M DBR BULK PACK SLICE
17000288	3M DBY-6 600V SPLICE K
17000298	3M DBR-6 600V SPLICE K

3M Scotchlok™ Connector



- Low voltage irrigation connector for quick, low voltage connections

ITEM	DESCRIPTION
17000300	3161R 3M SCOTCHLOK CONNECTOR

Scotchlok™ Seal Pack

- Insulate and provide protection for electrical spring connectors against dust, soil, water, and other environmental elements.
- Electrical insulating resin is a two-part epoxy insulating and encapsulating resin.
- 10/pack

ITEM	DESCRIPTION
17000310	3570G SCOTCHLOK SEAL PAK 10/PAK

Scotchlok™ Resin & Inline Splice Kits

- Resin is 2-part epoxy insulates and encapsulates. Use to splice dielectric and oil-filled cables.
- Insulate and seal single conductor, unshielded cable splices through 5 kV and multiple conductor cables through 1 kV. Kit makes 1 splice.

ITEM	DESCRIPTION
17000320	#4A SCOTCHLOK RESIN KIT
17000330	82-A1 3M INLINE SPLICE KIT

Scotchkote™ Electrical Coating



Provides a tough oil-resistant outer seal on electrical insulation subjected to abnormal weathering/moisture conditions, such as splices in manholes, underwater cables, etc.

- Brush-top can
- 15 fluid ounces

ITEM	DESCRIPTION
17000350	15 OZ CAN SCOTCHKOTE

Scotch™ 5-Way Penetrant

A multi-purpose product that is extremely effective as a demoisurant, rust preventative and penetrant.



- DEMOISTURANT - displaces moisture and "dries out" electrical apparatus, prevents shorting/increases conductivity.
- RUST PREVENTATIVE - spreads a thin, even film that penetrates the pores of the surface to inhibit rust and corrosion.
- PENETRANT - frees rusted, frozen bolts and nuts.


ITEM	DESCRIPTION
17000400	3M 17 OZ 5-WAY ELECT PENETRANT



Shrink Splice Kit

ITEM	DESCRIPTION
17000475	SHRINK SPLICE KIT 4PC 14/12/10
17000480	SHRINK SPLICE KIT 4PC #8 WIRE
17000485	SHRINK SPLICE KIT 4PC #6 WIRE

King IRR Wire Connectors



1. Safety-Action Live Spring ensures tight grip.
2. Prefilled Silicone Safety-Sealant stops flashover and corrosion.
3. UL Listed
4. Watertight/corrosion proof
5. Locks on w/ fewer twists
6. Seals from the inside out


ITEM	DESCRIPTION
17000540	IRR1 SM KING WIRE CONN BLK/WHT
17000560	IRR2 MED KING WIRE CONN BLK/GR
17000580	IRR3 LG KING WIRE CONN BLK/BLU

King "One Step" Direct Bury Waterproof Wire Connector

Splices 95% of wire combinations requiring 5 standard connectors. Wires are twisted as One-Step is applied.




One-step operation



- Saves effort, time, money
- No on-site assembly required
- No on-site filling required
- Unit twists easily without tools
- Spring cuts thread into wire on first turn for safe, tight grip

ITEM	DESCRIPTION
17000500	TAN KING WIRE CONNECTOR
17000520	BLUE KING WIRE CONNECTOR SMALL

Dri-Splice Wire Connector & Sealant



Designed to insure waterproof under-ground wire connections, the Dri-Splice Seal involves an interference webbing which expands to accommodate #10, #12, or #14 gauge wire sizes. The Seal

prevents solvent from leaking out of the unused holes.

Connector - DS 100

- One size fits all
- Includes crimp
- No special tools required

Sealant - DS-300

- 5 ounce tube
- 30 connections per tube (approx.)


Prefilled Connector- DS-400

- All the features of DS 100 plus pre-filled with Dielectric Silicone Sealant

ITEM	DESCRIPTION
17000610	DS-100 EWING DRI SPLICE CONN
17000630	DS-300 EWING DRI SPLICE SEALNT
17000640	DS-400 EWING PRE-FILL CONNECT

Power Cord

Meets OSHA requirements for indoor use and also for general purpose applications.



- Approved power cord for controller hookup
- 6 feet
- 3 wire
- 16/3 SPT

ITEM	DESCRIPTION
17000710	6 FT POWER CORD 3 WIRE



Industrial & Lantern Batteries


ITEM	DESCRIPTION
17000820	AA ALKALINE INDUSTRIAL BATTERY
17000850	9V ALKALINE INDUSTRIAL BATTERY
17000910	6V BATTERY FOR 521 SPRING TERM
17000915	6V ALKALINE BATTERY SCREW TERM
17000920	12V LANTERN BATTERY SCREW TERM

UL Schedule 40 PVC Conduit 10' Length




ITEM	DESCRIPTION
17001010	1/2 UL SCH 40 PVC CONDUIT
17001020	3/4 UL SCH 40 PVC CONDUIT
17001030	1 UL SCH 40 PVC CONDUIT
17001040	1-1/4 UL SCH 40 PVC CONDUIT
17001050	1-1/2 UL SCH 40 PVC CONDUIT
17001060	2 UL SCH 40 PVC CONDUIT
17001070	2-1/2 UL SCH 40 PVC CONDUIT
17001080	3 UL SCH 40 PVC CONDUIT
17001090	4 UL SCH 40 PVC CONDUIT

90° Sweep Ells




ITEM	DESCRIPTION
17001210	1/2 90 DEG UL PVC SWEEP ELLS
17001220	3/4 90 DEG UL PVC SWEEP ELLS
17001230	1 90 DEG UL PVC SWEEP ELLS
17001240	1-1/4 90 DEG UL PVC SWEEP ELLS
17001250	1-1/2 90 DEG UL PVC SWEEP ELLS
17001260	2 90 DEG UL PVC SWEEP ELLS
17001270	2-1/2 90 DEG UL SWEEP ELLS
17001280	3 90 DEG UL PVC SWEEP ELLS
17001290	4 90 DEG UL PVC SWEEP ELLS

45° Sweep Ells



ITEM	DESCRIPTION
17001410	1/2 45 DEG UL PVC SWEEP ELLS
17001420	3/4 45 DEG UL PVC SWEEP ELLS
17001430	1 45 DEG UL PVC SWEEP ELLS
17001440	1-1/4 45 DEG UL PVC SWEEP ELLS
17001450	1-1/2 45 DEG UL PVC SWEEP ELLS
17001460	2 45 DEG UL PVC SWEEP ELLS


Terminal Adapters



- S x MPT
- UL listed

ITEM	DESCRIPTION
17001610	1/2 UL TERMINAL ADAPTER PVC
17001620	3/4 UL TERMINAL ADAPTER PVC
17001630	1 UL TERMINAL ADAPTER PVC
17001640	1-1/4 UL TERMINAL ADAPTER
17001650	1-1/2 UL TERMINAL ADAPTER PVC
17001660	2 UL TERMINAL ADAPTER PVC

UL Couplings



- S X S
- UL Listed

ITEM	DESCRIPTION
17002010	1/2 UL COUPLING PVC
17002020	3/4 UL COUPLING PVC
17002030	1 UL COUPLING PVC
17002040	1-1/4 UL COUPLING PVC
17002050	1-1/2 UL COUPLING PVC
17002060	2 IN UL COUPLING PVC
17002070	2-1/2 UL COUPLING PVC
17002080	3 UL COUPLING PVC
17002090	4 UL COUPLING PVC



Steel Electrical Locknuts


ITEM	DESCRIPTION
17002410	1/2 STEEL LOCKNUT ELECTRICAL
17002420	3/4 STEEL LOCKNUT ELECTRICAL
17002430	1 IN STEEL LOCKNUT ELECTRICAL
17002440	1-1/4 STEEL LOCKNUT ELECTRICAL
17002450	1-1/2 STEEL LOCKNUT ELECTRICAL
17002460	2 IN STEEL LOCKNUT ELECTRICAL

TAYMAC ELECTRICAL PRODUCTS

Safety Enclosures, Industrial Grade Raintite Outlets, Switches & Cable




One Gang Duplex Receptacle
10510-deep cover, vertical mount



One Gang GFCI Receptacle
20510-deep cover, vertical mount

- Design provides raintight protection
- Comes with sealing gaskets and stainless steel mounting screws
- One gang: 4-7/8" L x 3" W
- Cover depths: standard 2-1/4"; deep 3-1/4"
- Mounts on either F-S or flush box
- UL listed, CSA approved

ITEM	DESCRIPTION
17003040	10510 TAYMAC DEEP R/T OUTLT CV
17003240	20510 TAYMAC DEEP R/T GFI COVR
17003320	TAN MM400 TAYMAC DUPLX/GFI CVR



PVC Flex Conduit & Fittings

ITEM	DESCRIPTION
17003710	1/2 PVC LIQUIDTITE FLX CONDUIT
17003720	3/4 PVC LIQUIDTITE FLX CONDUIT
17003810	1/2 PVC LIQUIDTITE 90 ELL CONN
17003820	3/4 PVC LIQUIDTITE 90 ELL CONN
17003910	1/2 PVC LIQUIDTITE STRAIGHT CN
17003920	3/4 PVC LIQUIDTITE STRAIGHT CN
17004010	1/2 ROMEX CONNECTOR
17004110	1/2 EMT STEEL STRAP ONE HOLE
17004120	3/4 EMT STEEL STRAP ONE HOLE

Junction Boxes

PVC conduit junction boxes, straight, L or round with gasket and cover.

ITEM	DESCRIPTION
17004210	1/2 PVC COND/BDY STR W/GSK-CVR
17004510	1/2 PVC COND/BDY LB W/GSK-CVR


Romex Cable w/ground

ITEM	DESCRIPTION
17007210	14/2 ROMEX CBL W/ GRD 25 FT

Miscellaneous Electrical

ITEM	DESCRIPTION
17007710	2006S COPPER CRIMP CONN 100/BX
17007711	2011S LG COPPER CRIMP CN 50/BX
17007921	KS15 CPR SPLIT BOLT CONN 8/10
17007922	K6 COPPER SPLIT BOLT CONN 6/8
17007923	K4 COPPER SPLIT BOLT CONN 4/8
17009420	86001 IVORY SWITCH PLATE

Conduit Boxes and Covers

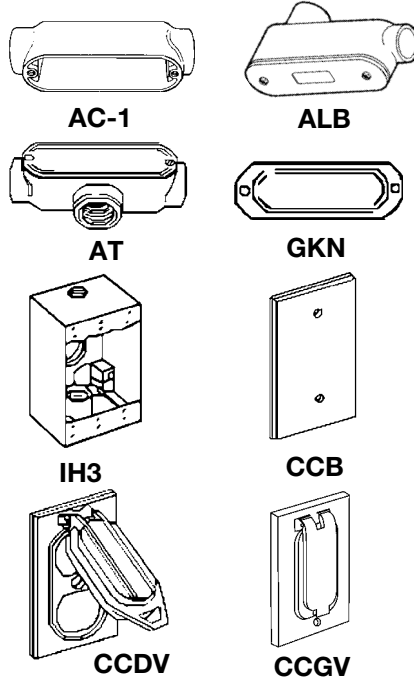

ITEM	DESCRIPTION
17005010	DAC1 1/2 CON/BDY STR W/GSK-CVR
17005110	ALB-1 1/2 COND/BDY EB W/GSK-CV
17005210	DAT-1 1/2 CON/BODY TEE W/GSK-CV
17005410	SCV-1 1/2 CONDUIT BODY COVER
17006010	IH3-1 1/2 SGL GANG BOX 3-HOLE
17006020	IH3-2 3/4 SGL GANG BOX 3-HOLE
17006030	IH4-1 1/2 SGL GANG BOX 4-HOLE
17006040	IH4-2 3/4 SGL GANG BOX 4-HOLE
17006120	IHE4-1 1/2 SGL GANG EXT 4-HOLE
17006410	CCB SLG GANG BOX COVER PLAIN
17006420	CCDV SGL GANG DUPLEX COVER VRT
17006440	CCGV SGL GANG GFCI COVER
17006620	CKMDV MED DUPLEX CODE KEEPER
17006640	CKMGV MED GFCI CODE KEEPER R/D
17007010	DUPLEX RECEPTICAL 3-WIRE IVORY
17007060	GFCI DUPLEX RECEPTICAL 3-WIRE

IDEAL Wire Nuts

71B & 72B wire connectors feature positive grip, ribbed caps for fast installation and secure connection. Flame retardant shell will not crack or break under extreme pressure.



- Longest fully seated square wire spring
- Threaded entry
- Deep skirt, wide thread

Crimp connectors are zinc plated and designed for making fast, secure and permanent pressure type wire connections.

ITEM	DESCRIPTION
17007510	71B GRAY IDEAL WIRE-NUT 100/B
17007520	72B BLUE IDEAL WIRE-NUT 100/B
17007610	341 TAN IDEAL TWISTER WIRE-NUT

Grounding Accessories

ITEM	DESCRIPTION
17007310	5/8 X 8FT COPPER GROUNDING ROD
17007920	5/8 HD GROUND ROD CLAMP
17007350	4 X 96 CU PLATE W/25'
17007941	CADWELD GR1161G 1CON 6&8 AWG
17007942	CADWELD GT1161G 2CON 6&8 AWG
17007943	CADWELD NT1161G 3CON 6&8 AWG
17007950	CADWELD T-320 FLINT IGNITOR

Coated Wire Staples

ITEM	DESCRIPTION
17007810	IDEAL PVC COATED WIRE STAPLE
17007820	IDEAL INSULATED CABLE STAPLE

Powerset Earth Backfill

Low-resistivity, hardening ground enhancement backfill for copper grounding systems.



ITEM	DESCRIPTION
17007990	POWERSET EARTH BACKFILL 50LB